


Product data sheet

Room thermostat (2-way contact) 24 V

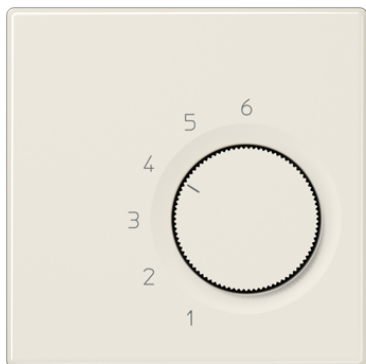

Reference number

TR LS 246

Room thermostat (2-way contact)

screwless terminals for wires up to 2.5 mm²

screw fixing only, without claws

1-pole, 2-way, heating 10 (4) A, AC 24 V ~

1-pole, 2-way, cooling 5 (2) A, AC 24 V ~

(The value in brackets indicates inductive loads with $\cos \phi = 0.6$)

Thermal feedback (neutral conductor required)

Hysteresis: 0.5 K, nominal range: +5 °C ... +30 °C

No OFF-position

Without switch and control LED

When set temperature is reached the NO/NC contact switches over.

Thermoplastic (breakproof) high-gloss

Colour:

ivory

Material:

thermoplastic