


Product data sheet

Socket, French/Belgian system with USB charger

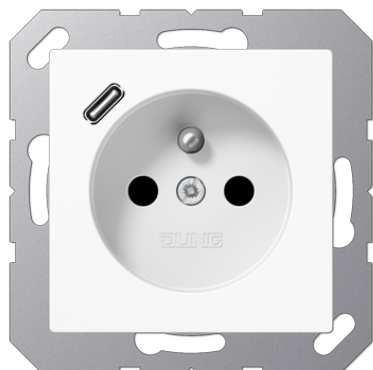

Reference number

A 1520 F-18 C WW

Socket, French/Belgian system with USB charger

2-pole + male earth pin, 16 A / 250 V ~
with enhanced contact protection / shutter (Safety Plus)
with 1 USB port type C
with quick charge function
screwless terminals for wires up to 2.5 mm²

Installation in flush box according to EN 60670-1
depth of flush box (inner dimension): min. 57 mm

JUNG Quick Charge® supports these standards

Technical data

Rated voltage:	AC 220 ... 250 V ~
Mains frequency:	50/60 Hz
Rated current, socket:	16 A
Output voltage USB:	DC 9 V / DC 5 V
Output current USB:	2 A / 3 A
Stand-by power:	≤ 25 mW
Ambient temperature:	+5 ... +35 °C
Storage/transport temperature:	-20 ... +70 °C
Installation depth:	48 mm
Protection level:	IP 20
Connection mode:	screwless connection
single wire:	1.5 ... 2.5 mm ²
stranded without ferrule:	1.5 ... 2.5 mm ²



Thermoplastic (breakproof) high-gloss

Colour:
white

Material:
thermoplastic