


Product data sheet

Decoupling relay for rail mounting

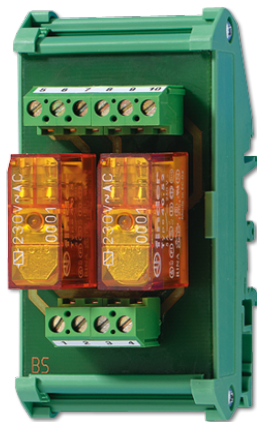

Reference number

TR-S REG

Decoupling relay for rail mounting

Rail mounting device, 2.5 rail units

For blinds control in case more than one motor should be connected to a mechanical switch/push-button or a motor control insert. The relay is designed for two drives.

Technical data

Rated voltage:	AC 230 V ~, 50 Hz
Control:	AC 230 V ~, 50 Hz
Switching capacity:	4 A, AC 230 V ~cos $\geq$ 0.8 ind.
Duty cycle:	100 %