


Product data sheet

Decoupling relay, flush-mounted

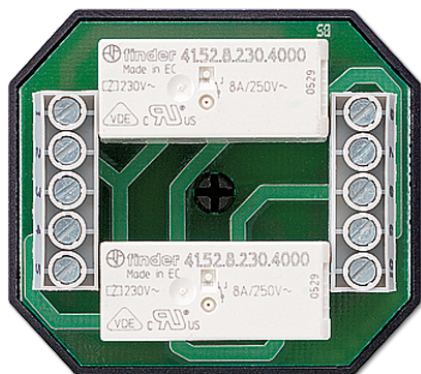

Reference number

TR-SUP

Decoupling relay, flush-mounted

For blinds control in case more than one motor should be connected to a mechanical switch/push-button or a motor control insert. The relay is designed for two drives. Decoupling relay for flush-mounting in wall box (deep wall box recommended).

Technical data

Rated voltage:	AC 230 V ~, 50 Hz
Control:	AC 230 V ~, 50 Hz
Switching capacity:	4 A, AC 230 V ~cos \geq 0.8 ind.
Duty cycle:	100 %