




Description: Key switch (2-pole)

Ref.-no.: 804.28 G

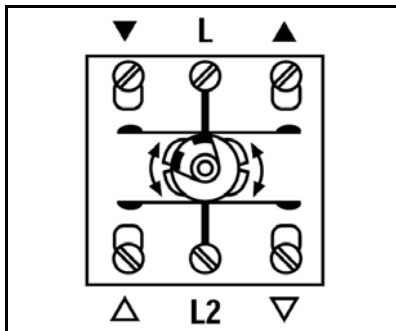

Contact assignments

## Technical data

|                    |                                           |
|--------------------|-------------------------------------------|
| Switching voltage: | AC 250 V ~                                |
| Switching current: | 10 AX                                     |
| Connection:        | screw terminals up to 2,5 mm <sup>2</sup> |
| Switch type:       | 2-pole (2 motors)                         |
| Housing:           | 90 x 75 x 65 mm                           |
| Protection level:  | IP 44                                     |

## Accessories

|                   |                                                       |
|-------------------|-------------------------------------------------------|
| Profile cylinder: | Ref.-no.: 28 (different locks)                        |
|                   | Ref.-no.: 28 G (equal locks)                          |
| Extra key:        | Ref.-no.: 28 GSL (for profile cylinder ref.-no. 28 G) |
| Locking plate:    | Ref.-no.: 18 V                                        |