


# Product data sheet

Socket, French/Belgian system with USB charger

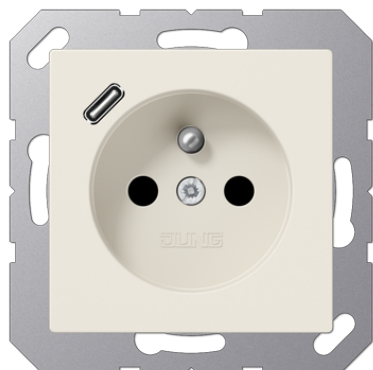

## Reference number

A 1520 F-18 C

## Socket, French/Belgian system with USB charger

2-pole + male earth pin, 16 A / 250 V ~  
with enhanced contact protection / shutter (Safety Plus)  
with 1 USB port type C  
with quick charge function  
screwless terminals for wires up to 2.5 mm<sup>2</sup>

Installation in flush box according to EN 60670-1  
depth of flush box (inner dimension): min. 57 mm

JUNG Quick Charge® supports these standards

## Technical data

Rated voltage:	AC 220 ... 250 V ~
Mains frequency:	50/60 Hz
Rated current, socket:	16 A
Output voltage USB:	DC 9 V / DC 5 V
Output current USB:	2 A / 3 A
Stand-by power:	≤ 25 mW
Ambient temperature:	+5 ... +35 °C
Storage/transport temperature:	-20 ... +70 °C
Protection level:	IP 20
Connection mode:	screwless connection
single wire:	1.5 ... 2.5 mm <sup>2</sup>
stranded without ferrule:	1.5 ... 2.5 mm <sup>2</sup>



## Thermoplastic (breakproof) high-gloss

**Colour:**  
ivory

**Material:**  
thermoplastic