


Product data sheet

Universal blinds insert

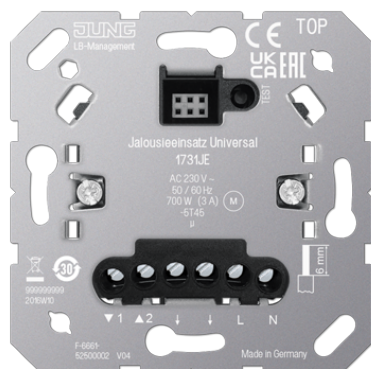

Reference number

1731 JE

Universal blinds insert

with satellite input
for covers ref.-no.: .. 1700 .., .. 1701 .., .. 1750 D .., .. 1751 BT ..

Intended use

- Controlling electrically driven blinds, shutters and awnings
- Automatic time control via cover or satellite input
- Operation with suitable cover of the LB Management
- Installation in flush box according to EN 60670-1

Product characteristics

- The integration into group controls or master controls is possible by means of extension inputs
- Automatic control via timer
- Test operation for functional test
- Operation as a main device or extension unit
- Wind alarm interlock via the extension input
- Pole changing of outputs for simplified commissioning from version V01 upwards
- Saving of a ventilation position possible using the cover

Technical data

| | |
|---------------------------|---|
| Rated voltage: | AC 230 V ~ |
| Mains frequency: | 50/60 Hz |
| Ambient temperature: | -5 ... +45 °C |
| Contact type: | µ |
| Stand-by power: | max. 0.2 W |
| Running time: | approx. 120 s |
| Connected load | |
| Motors: | 700 W |
| Connection | |
| Connection mode: | screw terminals |
| single wire: | 1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 2.5 mm ² |
| stranded without ferrule: | 1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 2.5 mm ² |
| stranded with ferrule: | 1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 1.5 mm ² |