


# Product data sheet

## KNX push-button extension 2-gang

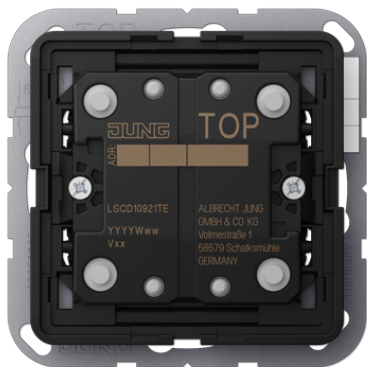

### Reference number

LS CD 10921 TE

### KNX push-button extension 2-gang

#### Intended use

- Operation of loads, e.g. light on/off, dimming, blinds up/down, brightness values, temperatures, calling up and saving light scenes, etc.
- Installation in flush box according to EN 60670-1

#### Product characteristics

- Operating concept (rocker or button) adjustable for each operating area
- Button evaluation (single- or dual-area operation) adjustable
- One or two functions per operating area
- Without status LED
- Without bus coupling unit
- Connection to push-button universal possible

#### Technical data

##### Ambient conditions

Ambient temperature:	-5 ... +45 °C
Storage/transport temperature:	-25 ... +70 °C