




Description: 1-gang push-button (1-pole, 1-way)
with neutral lens

Ref.-no.: 831 W

illumination possible with lamps

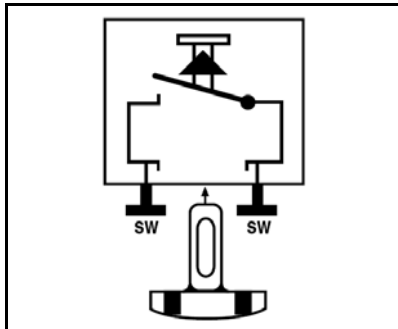

Contact assignments

Technical data

Switching voltage: AC 250 V ~
Switching current: 10 AX
Connection: spring clip
Switch type: 1-pole, 1-way (make contact)

Accessories

Lamp: Ref.-no.: 90 (230 V, 1.1 mA)
Ref.-no.: 95 (230 V, 0.5 mA)
Ref.-no.: 96-12 (12 V, 40 mA)
Ref.-no.: 96-24 (24 V, 25 mA)
Ref.-no.: 96-36 (36 V, 20 mA)
Ref.-no.: 96-48 (48 V, 25 mA)

LED lamp: Ref.-no.: 961248 LED RT (red 12 – 48 V, ca. 4 mA)
Ref.-no.: 961248 LED GN (green 12 – 48 V, ca. 4 mA)
Ref.-no.: 90-LED RT (red 230 V, ca. 1.1 mA)
Ref.-no.: 90-LED GN (green 230 V, ca. 1.1 mA)

Symbols: Ref.-no.: 33 AN L (anthracite, symbol light)
Ref.-no.: 33 AN K (anthracite, symbol bell)
Ref.-no.: 33 AN T (anthracite, symbol door)
Ref.-no.: 33 AN STOP (anthracite, STOP)
Ref.-no.: 33 AN N (anthracite, neutral)
Ref.-no.: 33 GN (green, neutral)
Ref.-no.: 33 NR (red, neutral)
Ref.-no.: 33 KLAR (transparent)