


Product data sheet

Rotary blind switch insert 1-pole

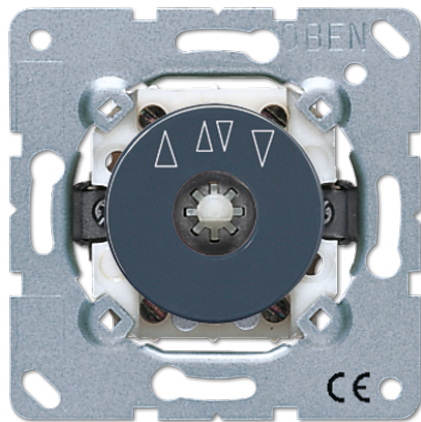

Reference number

1234.10

Rotary blind switch insert 10 A / 250 V ~

screw terminals for wires up to 2.5 mm²

Can be converted into rotary push-button by means of locking piece (included).

A pre-travel prevents a quick change of direction.

Spare scale disc

for ref.-no. 1234.10 and 1234.20: SKS 1234.10

Spare locking piece

ref.-no.: 34.10

Centre plates:

AS / A ranges: ref.-no. .. 1541 ..

CD range: ref.-no. CD 1541 ..

SL range: ref.-no. SL 1541 ..

LS range: ref.-no. LS 1941 .., .. 1941 ..

Scale disc anthracite

Version:

1-pole (1 motor)

Power SBL (self-ballasted lamps):

max. 100 W